


FT-110 Series - TurboFlow™

TURBINE TYPE

Economical Flow-Rate Sensors

- ▶ Low Cost Plus High Accuracy ±3% of Reading
- ▶ Measures Low Liquid Flow Rates of 0.4 to 30 l/min
- ▶ FDA Approved Materials
- ▶ Lightweight Plastic design enables mounting in any position

Hall effect turbine flow rate sensor is ideal for OEM applications involving low flow liquid monitoring. The low cost coupled with 0.5% repeatability makes it an ideal candidate for replacing dispensing timer systems. Unlike existing timing systems, turbine technology is not influenced by changes in system pressure caused by ageing filters. The sensor's standard power and output specifications make it easy to retrofit to existing controllers.

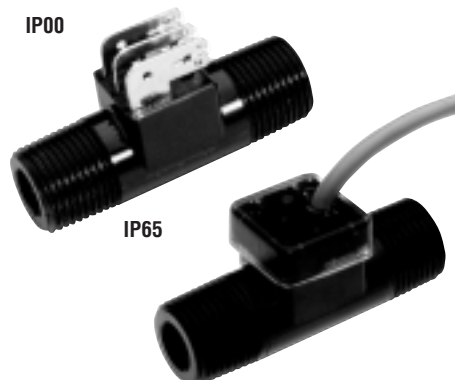

Specifications

Wetted materials	
Body	Nylon 12
Turbine	Nylon 12 Composite
Bearings	PTFE/15% Graphite
Operating pressure	14bar max
Burst pressure	170bar
Operating temperature	-20°C to 100°C (Ambient +80°C for cable)
Viscosity	32 to 81 SSU (.8 to 16 Centistokes)
Filter	<50 Microns
Input power	5 to 24 VDC @ 8mA
Output	NPN Sinking Open Collector @ 50mA Maximum (1 to 2.2K Ohm Pull-Up Resistor Required) (Hz Output)
Accuracy	±3% of Reading
Repeatability	0.5% of Full Scale
Electrical connection	Spade Terminals 2.8/6.3 x .8mm : 1m cable
Inlet/outlet ports	3/8" NPT Male : G 3/8" Male

How to Order

Specify Part Number based on desired flow range and thread type


Flow Range Litres/m	Pulses per Litre	Frequency Output	Part Number				Pressure Drop Code
			Terminals		Cable		
			3/8" NPT	G 3/8"	3/8" NPT	G 3/8"	
.5-5	6900	58-575 Hz	173931	173936	173931-C	173936-C	A
1-10	3300	55-550 Hz	173932	173937	173932-C	173937-C	
1-15	4600	76-1150 Hz	173933	173938	173933-C	173938-C	
1-15	2200	37-550 Hz	173934	173939	173934-C	173939-C	B
2-30	1000	33-500 Hz	173935	173940	173935-C	173940-C	

● Consult Sales Office if there is a possibility of particles in the flow stream.


FT-110 Accessories

Description	Part Number
Mating connector w/1m, 3 conductor, PVC pigtail leads	173941
Mating connector w/3m, 3 conductor, PVC pigtail leads	173942


Dimensions (in mm)

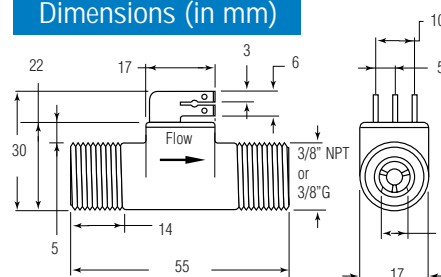

Wiring (Integral Cable in brackets)

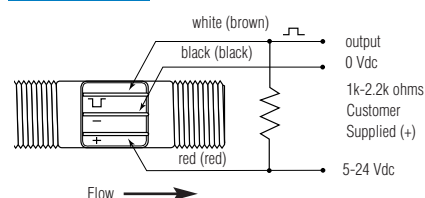

Pressure Drop - Typical

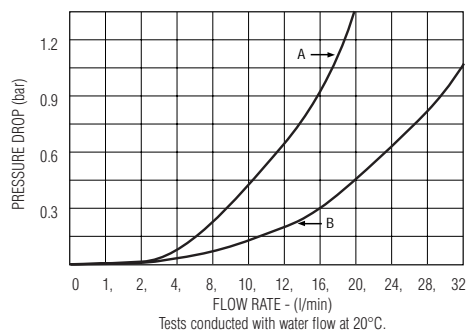

FLOW SWITCHES