



## ATS-TR Temperature Transmitter Range

**Temperature ranges:** -50°C-100°C, 0°C-200°C & 0°C-350°C


**Connection size:** 1/2" BSP

**Terminal head:** Aluminium IP67

The ATS-TR range features a 304 grade 6mm stainless steel sheath and 1/2" BSP fitting with an aluminium IP67 terminal head; the sensor is a class A, 3 wire PT100 fitted with a 4-20mA transmitter.

### Specifications

<b>Accuracy</b>	Class A
<b>Temperature Ranges</b>	-50°C-100°C 0°C-200°C 0°C-350°C
<b>Output</b>	4-20mA
<b>Supply Voltage</b>	12-24Vdc
<b>Maximum Pressure</b>	20 Bar
<b>Test Quality Standard</b>	IEC584, IEC1515, GB/T16839-1997, JB/T5582-91
<b>Length Options (including 15mm thread) Dimension X</b>	50mm 150mm 350mm
<b>Wetted Parts</b>	304 Stainless Steel
<b>Threaded Connection</b>	1/2" BSP
<b>Terminal Head</b>	Aluminium IP67 with cable gland

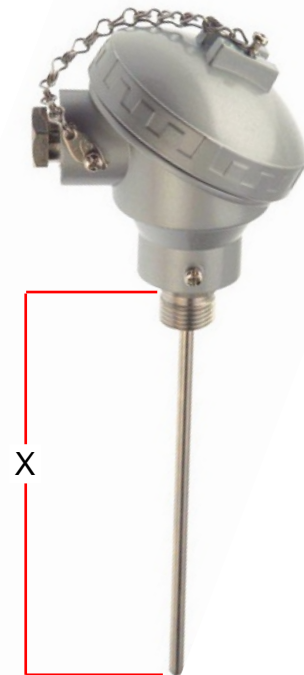

### Example part number:

ATS-TR150/-50/100°C (Model: Sheath length: Temperature range)