

# NORMALLY OPEN VALVE BODIES SERVO-ASSISTED DIAPHRAGM



Normally  
Open



Solenoid valves suitable for large flow capacity, suitable for water, air, oil, inert gases and other fluids which are non-corrosive for copper alloys, with viscosity up to 2° Engler

## INSTALLATION AND OPERATION

- > 2 way valve normally-open
- > Servo-assisted membrane actuator
- > Female end connections, size G3/8" to 2"
- > Media enters the space above and under the membrane
- > When the coil is energized, the pilot plug closes and the upstream media enters the space above the membrane, pressing it against the seat, preventing the flow
- > N.B. minimum differential pressure : 0.1 bar

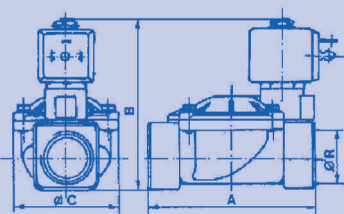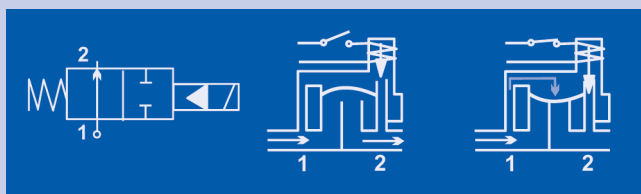

TYPE	A	B	C
29C	69	92.5	40
29D	72	94.5	40
29E	100	100	65
29F	104	105.5	65
29G	145	127	102
29H	145	127	102
29I	173	141	118

Dimensions and weights are inclusive of coil

## SPECIFICATIONS

- > Closing time : 10 msec.
- > Press-forged brass body
- > Internal parts in stainless steel ( 17 % CR )
- > Gaskets in NBR ( buna N )

## MAGNETS

- > See Coils page for voltage selection and technical data

TYPE	Through bore dia. Ø mm	Female connection BSP	Kv m³/h	Shut down time with 1 bar DP sec	Minimum differential pressure bar	Maximum differential pressure bar	Test pressure (DIN2401) PN bar	Working Temperature °C	Unit Weight Kg
29C	13	G 3/8	3	1	0.1	20	25	-10 to 90	0.56
29D	13	G 1/2	3	1	0.1	20	25	-10 to 90	0.59
29E	20	G 3/4	8.4	1.5	0.1	20	25	-10 to 90	1.05
29F	25	G 1	9.6	1.5	0.1	20	25	-10 to 90	1.11
29G	35	G 1 1/4	25.2	2.5	0.1	10	16	-10 to 90	3.12
29H	40	G 1 1/2	30	3	0.1	10	16	-10 to 90	2.87
29I	50	G 2	37.2	3.5	0.1	10	16	-10 to 90	4.26

Kv = water flow in m³/h with pressure drop of 1 bar (1 bar = 100kPa)