T: +44 (0)1825 764737
F: +44 (0)1825 768330
E: info@appeng.co.uk
www.appeng.co.uk

APPLICATIONS
ENGINEERING LTD

DUAL PORT
FIRE SPRINKLER VALVE SET

T: +44 (0)1825 764737
F: +44 (0)1825 768330
E: info@appeng.co.uk
www.appeng.co.uk

APPLICATIONS ENGINEERING LTD

DUAL PORT FIRE SPRINKLER VALVE SET

Benefits and Design features

- Dual ports that enable the flow switch to be mounted on either side.
- Uses the Sika flow switch which has been designed specifically for the valve set to operate at 25 L/min
- The flow switch has a ¾" union nut for simple, hand tight, installation. No need for tools or awkward 360° rotation of the whole switch.
- Available with optional CPVC mating sockets.
- 100% pressure tested.
- Supplied with DIN 43650 electrical connector as standard
- Lockable inlet valve handle
- 1" full bore test valve
- Glycerine filled 16 bar pressure gauge
- Easy access for servicing
- Space saving - 232.5mm end to end
- Less joints minimise risk of leaks
- Different flow switch options available including cable versions and brass paddle versions

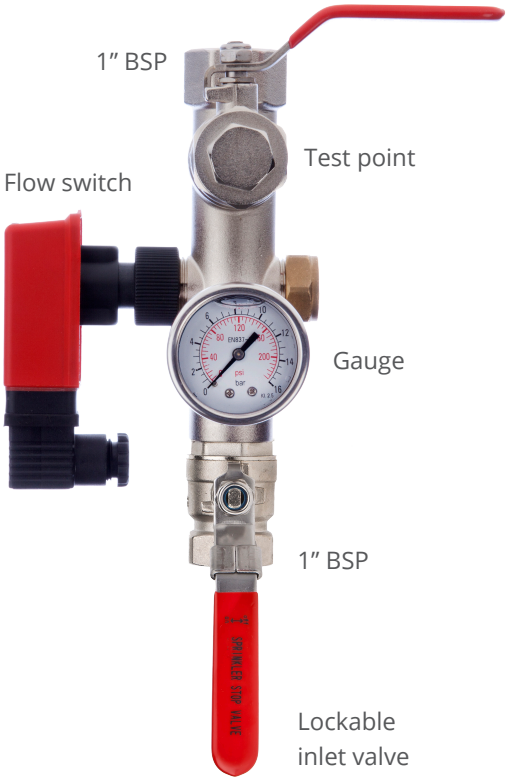

We also supply a full range of WRAS approved single and double check valves.

WRAS
WATER REGULATIONS ADVISORY SCHEME