

The KYTOLA® model TTFH is a sturdy industrial variable area flow meter. It has a stainless steel body with a heavy-duty impact resistant acrylic flow tube. It is a reliable instrument for measuring and monitoring large water flows.



- Flow rate water up to 260 USGPM (1000 LPM)
- Maximum pressure 232 psi (16 bar)
- Maximum temperature 167°F (75°C)
- Minimum temperature seals -22°F (-30°C) nitrile
-4°F (-20°C) Viton®
- Flange connections DN 80

ISO 9001 ISO 14001



FLOW METER TTFH

FEATURES

- Sturdy construction
- Stainless steel body
- Acrylic (PMMA) impact resistant flow tube

TYPICAL APPLICATIONS



- Water treatment
- Power plants
- Swimming pools

OPTIONS

- Viton®, EPDM seals
- Special scale markings

Model	TTFH
Body	AISI 316
Flow tube	Acrylic (PMMA)
Float	AISI 329 Note! Other possible wetted metal parts: AISI 316
Seals	Nitrile (*Viton®, *EPDM)
Max. pressure	232 psi (16 bar)
Max. temperature	167°F (75°C)
Connections	DN 80
Weight	38.6 lbs. (17.5 kg)
*Special construction on request	

TT		—	—	—	—
Connections					
DN 80 flanges		FH			
Flow Range H₂O					
USGPM	LPM				
20–160	75–600	4A			
20–260	100–1000	4B			
Scale					
H ₂ O LPM at +20°C		A			
H ₂ O USGPM at +70°F		G			
Options					
Viton® seals		V			
EPDM seals		Y			

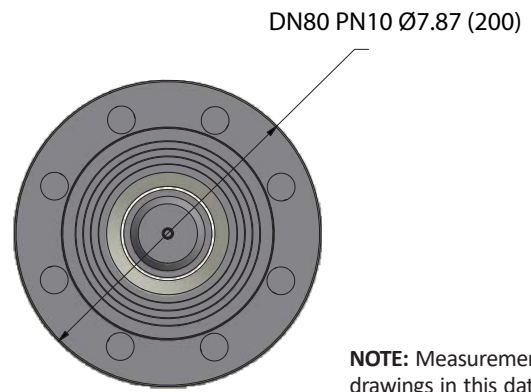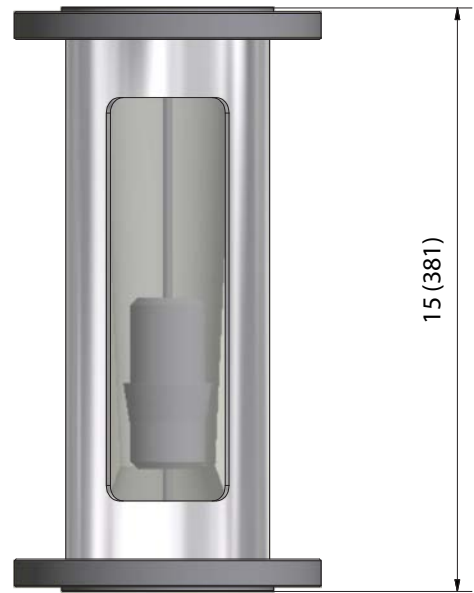

NOTE: Measurements in the drawings in this datasheet are in inches (and millimeters) if not stated otherwise.



www.kytola.ca



Kytola Instruments Inc.
 900 Old Roswell Lakes Parkway, Suite 120
 Roswell, GA 30076, USA
 Tel: +1 678 701 3569
 Fax: +1 514 448 5151
 E-mail: flow@kytola.ca

Copyright © Kytola Instruments Oy 2019. Dimensions and measurements are given within normal tolerances. Manufacturer reserves the right to changes without prior notification. TTFH_22NA_en Published 5/2019.