




Monitored Ball Valve

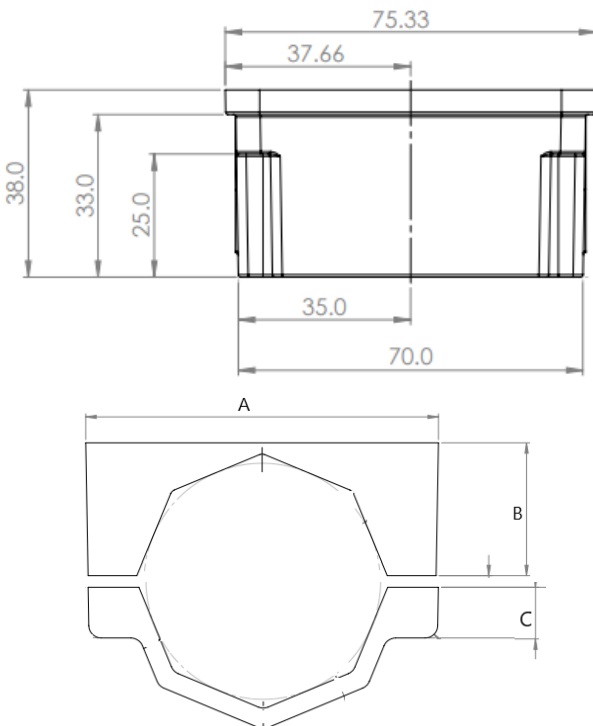

Electrical Protection: IP54

Application Engineering's Monitored Ball Valve (MBV) is designed to monitor the fully open position of a ball valve. The MBV has a toggle switch, which is activated when the ball valve handle is moved from the fully open position.

The MBV can be fitted onto an Applications Engineering Ball Valve or onto an Applications Engineering Fire Sprinkler Valve Set. For both options it currently comes in size 1", 1 1/4", 1 1/2" and 2".

MBV Material Specification

Part	Material
Housing	Fire Resistant ABS
Clamp	Fire Resistant ABS

The MBV has two methods of wiring:

The switch has SPDT contacts and can be used simply for just normally open or normally closed operation.

The other method of wiring is in conjunction with a fire sprinkler pane. For use with a fire sprinkler panel there are terminals for an end of line resistor and fire resistor so that the output from the device can be connected into a dedicated zone on the fire panel, signalling fault when the ball valve is closed and fire on activation of the flow switch.

DN	A	B	C
1"	56.0	22.0	8
1 1/4"	68.0	30.5	8
1 1/2"	76.0	36.0	8
2"	90.0	45.0	8

Order Number	Description
AE-MBV-100-BV	1" Ball Valve with 1" Clamp, MBV and 1m of FP200 cable pre wired
AE-MBV-125-BV	1 ¼" Ball Valve with 1 ¼" Clamp, MBV and 1m of FP200 cable pre wired
AE-MBV-150-BV	1 ½" Ball Valve with 1 ½" Clamp, MBV and 1m of FP200 cable pre wired
AE-MBV-200-BV	2" Ball Valve with 2" Clamp, MBV and 1m of FP200 cable pre wired
AE VS1-A-M	1" Valve set with Flow Switch, 1" Clamp, MBV and 1m of FP200 cable pre wired
AE VS2-A-M	1 ¼" Valve set with Flow Switch, 1 ¼" Clamp, MBV and 1m of FP200 cable pre wired
AE VS3-A-M	1 ½" Valve set with Flow Switch, 1 ½" Clamp, MBV and 1m of FP200 cable pre wired
AE VS4-A-M	2" Valve set with Flow Switch, 2" Clamp, MBV and 1m of FP200 cable pre wired