



Brass Double Check Valves

To complement our fire sprinkler valve set, Applications Engineering Ltd offer a range of Double WRAS approved brass check valves with sizes ranging from 1" BSP to 2" BSP. These can be purchased separately or fitted to our Valve Sets

Part Numbers


AE-DCV-25	25mm/G1" Female/Female
AE-DCV-32	32mm/G1-1/4" Female/Female
AE-DCV-40	40mm/G1-1/2" Female/Female
AE-DCV-50	50mm/G2" Female/Female



Material Specifications

Body	DZR alloy
'O' ring	Nitrile/EPDM Rubber
Cartridge	POM

Dimensions

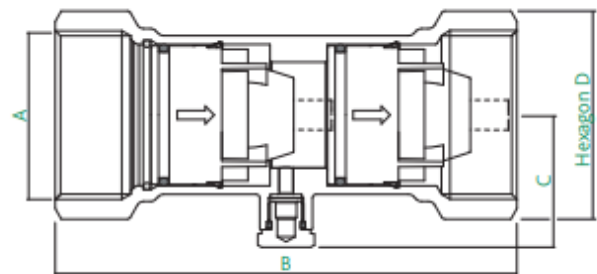

Size	A	B	C	D	kg
AE-DCV-25	1"	94	25	38	0.36
AE-DCV-32	1 1/4"	118	33.5	46	0.49
AE-DCV-40	1 1/2"	131.5	37.5	53	0.51
AE-DCV-50	2"	181	37.5	64	0.82

Technical Data

Max. Operating Temperature	60 °C
Max. Operating Pressure	16 Bar
Min. Operating Pressure	0.2 Bar
Conforms to	BS EN 13959

