


# LA3

## ELECTROMAGNETIC LEVEL SWITCH: SPDT - ADJUSTABLE ROD

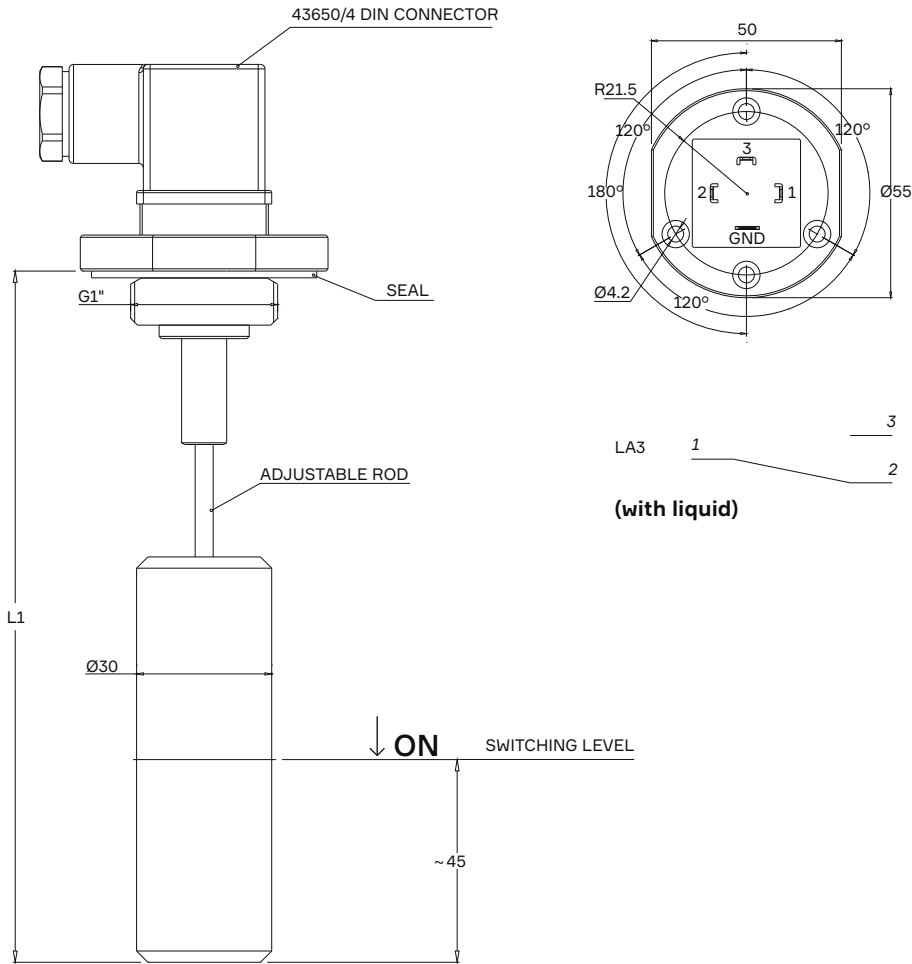

Connection holes	Electrical features	Technical features	Materials
<ul style="list-style-type: none"> <li>• Three holes flange - 120°</li> <li>• Two holes flange - 180°</li> <li>• 1" BSPP</li> </ul> <p><i>Three types of connections in a single execution.</i></p>	<ul style="list-style-type: none"> <li>• Electrical connection in accordance with DIN 43650/A</li> <li>• Electrical protection in accordance with DIN 40050 - IP 65</li> <li>• Maximum electrical load NO / NC: 30V AC / DC - 0.25A</li> <li>• Other electrical features on request.</li> </ul>	<ul style="list-style-type: none"> <li>• Max pressure: 5 bar</li> <li>• Max fluid viscosity: 150 cSt</li> <li>• Fluid temperature: -10 ÷ 90 °C</li> <li>• Adjustable rod</li> </ul>	<ul style="list-style-type: none"> <li>• Rod: Stainless Steel 316</li> <li>• Floater: PA66</li> <li>• Housing: Anodized Aluminum</li> </ul>

### Select specifications for product coding

1.	Rod Length L1 (mm)	050	100
		500	1000
2.	Customizations	.00	.XX
		Standard	Customized product

LA3

1.

2.