



# AFS-30205




### Technical Data

Operating Temperature	-20°C~80°C
Switching Rating	250VAC/50W
Max. carry Current	0.7A
Lead Wire	5m (Other lengths available on request)
Float density	0.62 g/cm <sup>3</sup>
Medium	Water, Diesel, AdBlue




Reversible Float – remove bottom circlip and reverse float for opposite operation. Operation shown below;

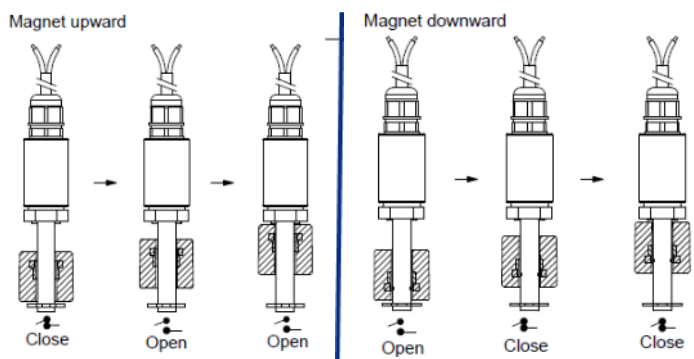

## Adjustable & Submersible Tank Level Switch

The AFS range of adjustable and submersible level switches has been developed to meet the requirements of the tank and bund industry.

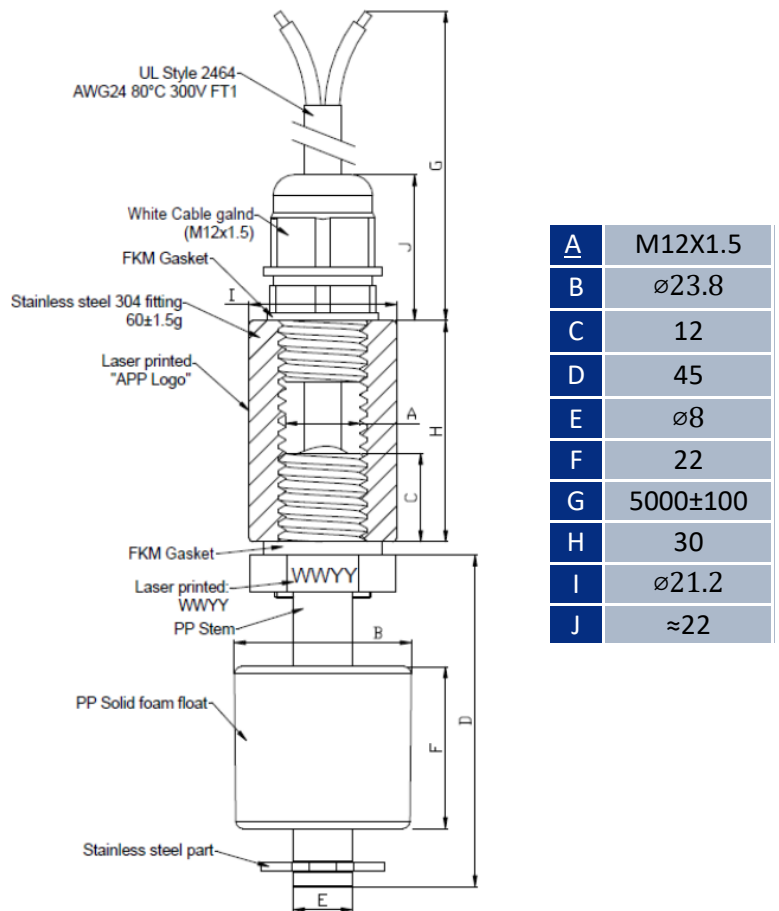

### Order Codes

AFS-30205	Standard level switch, float weight, cable gland, No Cap
AFS-28557	AFS-30205 with 1 ½" brass cap
AFS-28559	2 x AFS-30205 with 1 ½" brass double cap
AFS-28801	AFS-30205 with 1" plastic threaded plug
AFS-28833	AFS-30205 with 1 ½" plastic cap

