


T: +44 (0)1825 764737
F: +44 (0)1825 768330
E: info@appeng.co.uk
www.appeng.co.uk



APPLICATIONS
ENGINEERING LTD

Custom Level Switch Flanged Connection

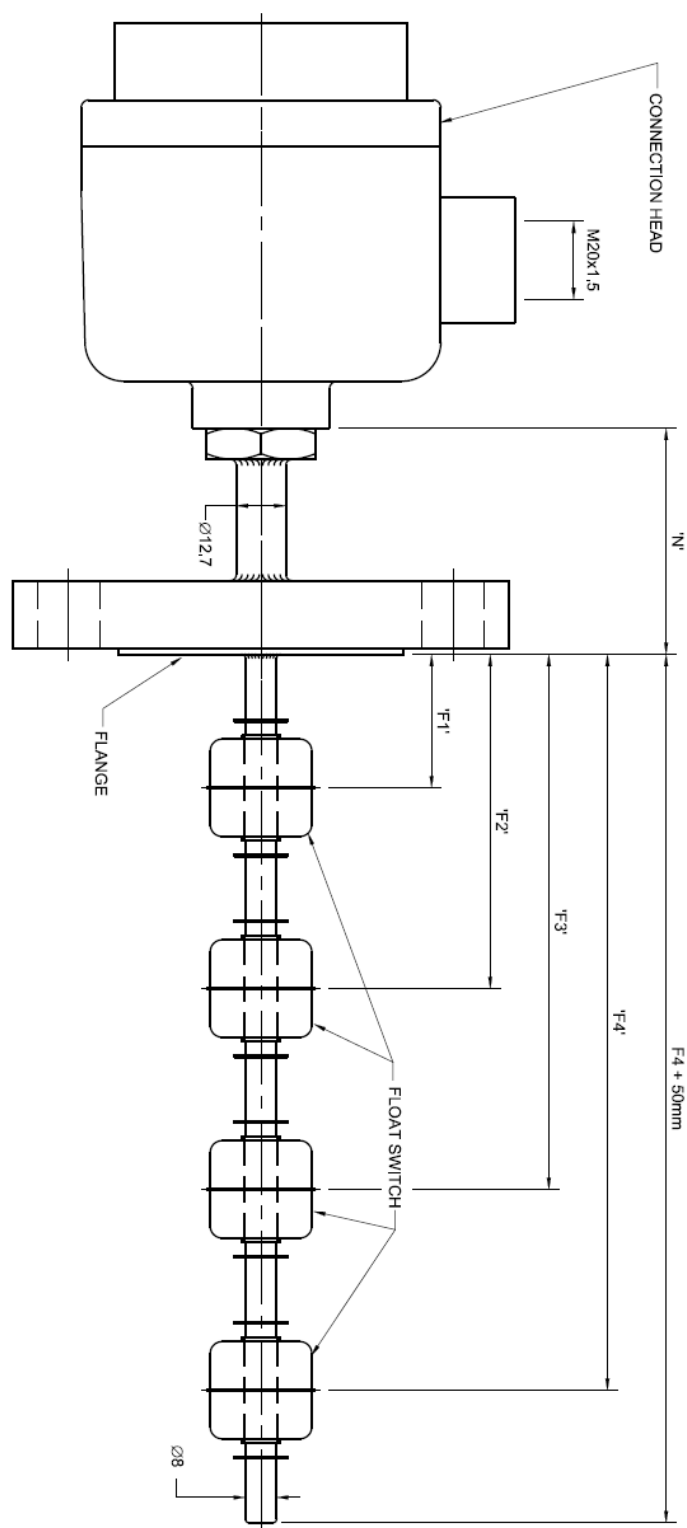

Options Matrix

Float Style
316 Stainless Steel
Polypropylene
Buna-N
Switch Points
One Float – Custom Length Xmm
Two Floats – Custom Lengths Xmm
Three Floats – Custom Lengths Xmm
Four Floats – Custom Lengths Xmm
Switch Function of Each Float
Normally Open
Normally Closed
Changeover
Approvals
ATEX/IECEX Exia II 1 GD
ATEX/IECEX Exd II 2 GD
None
Connection Head
Type 46W (Plastic)
Type 55/A (Aluminium)
Type 55/S (316 Stainless Steel)
Extension Length (N)
50mm
Xmm
Flange Size
1"
1 1/2"
2"
2 1/2"
DN25
DN40
DN50
DN80
Flange Rating
150lb
300lb
600lb
900b
1500lb
PN16
PN25
PN40
Flange Type
Raised Face
Flat Face
Ring Type Joint
Other
Integral Temperature Switches
Integral PT100
Other Options Available On Request

Dimensions in mm

This data sheet is designed as a guide and should not be regarded as wholly accurate in every detail. We reserve the right to amend the specification of any product without notice

Applications Engineering Ltd, Liberty House, Unit 9C Michael Way, Ashdown Business Park, Maresfield, East Sussex,
TN22 2DU, UK

REGISTERED IN THE UK, COMPANY NO. 01754698 (ENGLAND) - VAT NO. GB 207 6966 82