




APPENG.CO.UK
Text: 14MM X 2MM (Approx)

14MM X 7MM (Approx)

DESCRIPTION	PART NO. & SPECIFICATION
Switching capacity	50W SPST
Switching voltage	240Vac/200Vdc
Switching current	0.5A
Carry current	1A
Conduit	DIN 43650C
MAX. Pressure	5kg/cm ²
Operating Temp	-20°~120°C
Material	SUS316L
Suitable	S.G.: 0.92

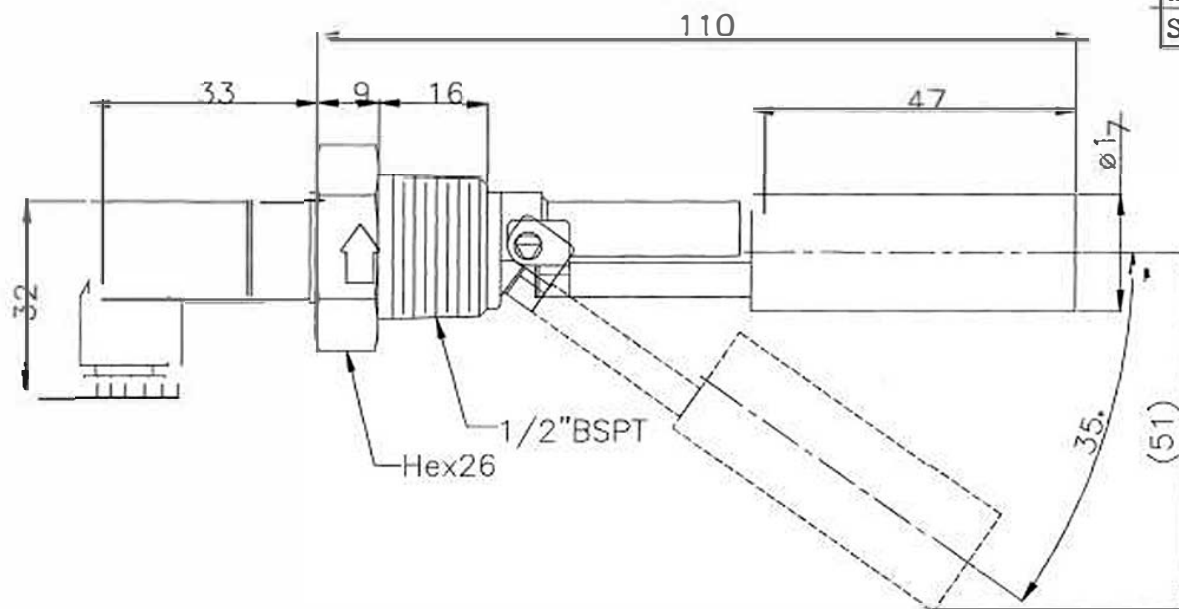

MAGNEIC FLOAT LEVEL SWITCH



APPLICATIONS
ENGINEERING LTD

SA APPROVED	<i>[Signature]</i>	APPROVED BY CLIENT	
SALES	<i>[Signature]</i>	RD/PR APPROVED	<i>[Signature]</i>

MODEL: RF-MH56CBS WRAS

DRAWING	Rachel	DATE:	2014.10.03	UNIT:	mm	REV.	DO
				SCALE:	1:1		