

# Electric Quarter Turn Actuator HQ-005

## Features

- Multi voltage design (Single phase & 24VAC/DC)
- High corrosion resistance, anodized & painted housing
- 4 off Limit switches
- Torque output: 50 Nm
- low current, long-life actuator due to unique brushless DC motor ensuring high reliability
- 2 off M20 cable entries
- IP67 weatherproof enclosure
- F03/F04/F05/F07 mounting base with 14mm Star drive
- Captive cover bolts
- Visual beacon indicator & LED lamps
- 70% Duty Rating (on/off only)
- Declutchable manual override handwheel
- Electronic torque limiter




## Description

HQ005 Electric actuator is specially designed for small quarter turn valves, such as ball, butterfly, plug valves, dampers and other similar usages. The actuator housing is made from high grade aluminum die cast which is robust and light weight. To provide high corrosion resistance, the housing is hard anodized inside & outside prior to being polyester coated. The actuator is fitted with manual override handwheel and declutch system for use when power is lost or in an emergency.

Options include 4-20mA/0-10VDC input/output modulating positioner card for all voltages and rechargeable battery backup for failsafe functionality. A set of high-quality lithium batteries are constantly trickle charged ensuring optimum performance anytime there is a power failure. The actuators can be easily set to fail closed or open and a charge status LED indicates battery health. All options are fitted within the standard housing.

## Design Construction

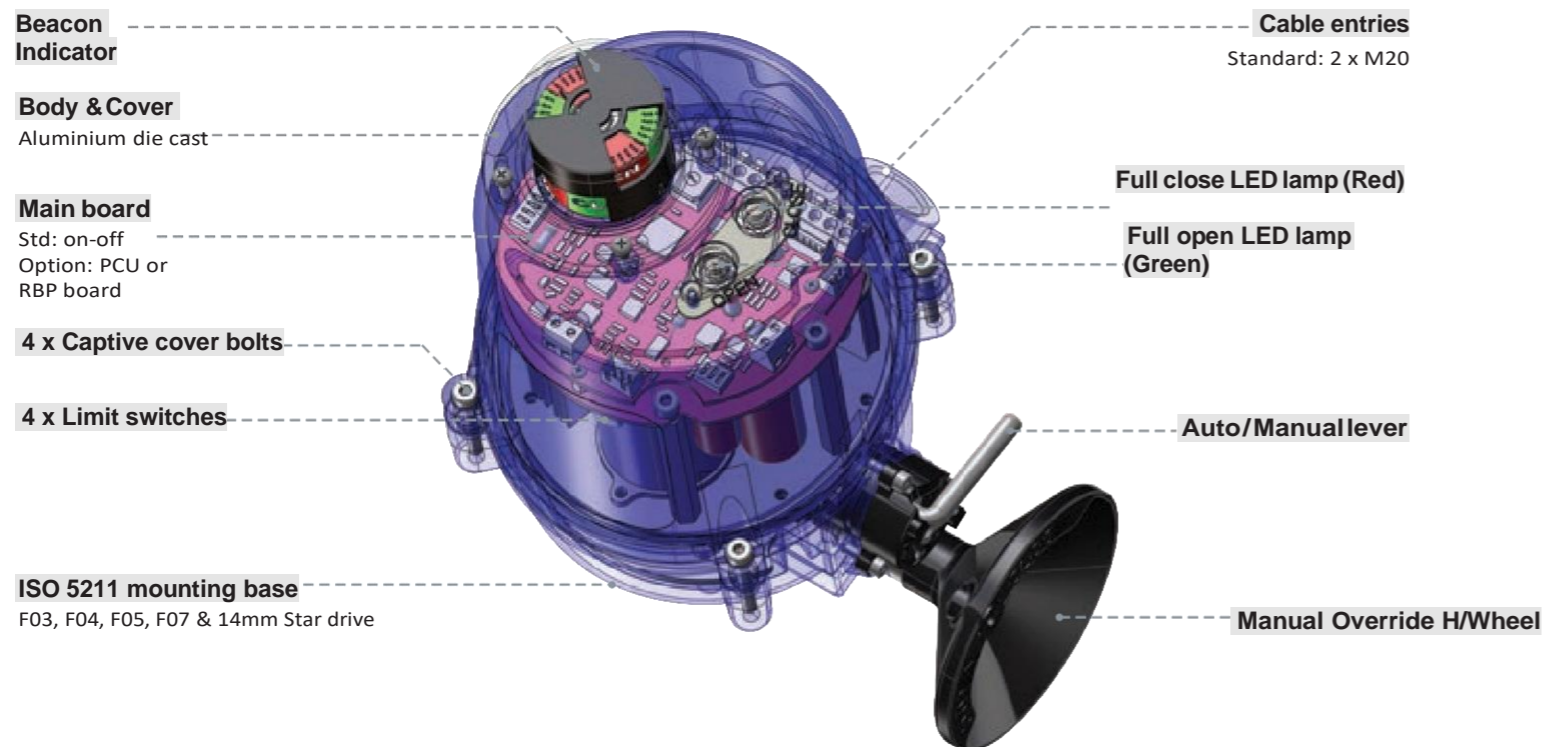

## Performance Data

Model	Max. output torque		Operating time 50/60 Hz	Mounting base	Motor Stall Current	Rated current (A)			Duty cycle IEC34-1		Weight kg
	kgf.m	NM				1 phase, 50/60 Hz		24 VAC/DC	S4	S2	
			110 VAC	220 VAC							
HQ-005	5	50	13 sec	F03, F04, F05, F07	1 A	0.1 A	0.05 A	0.8 A	70 %	50 %	2.6

## Standard Specification

<b>Enclosure</b>	Weatherproof enclosure IP67
<b>Power supply</b>	85 - 265 VAC 1 ph, 50/60 Hz   24 VAC/DC
<b>Duty cycle</b>	S4: 70% (average load of 80% Max. torque) S2: 50% (average load of 80% Max. torque)
<b>Motor</b>	BLDC motor
<b>Limit switches</b>	2 x open/close, SPDT, 250 V ac 10 A rating
<b>Additional limit switches</b>	2 x open/close, SPDT, 250 V ac 10 A rating
<b>Anti-condensation board</b>	2 W
<b>Manual override</b>	Manual Handwheel
<b>Cable entries</b>	2 x M20
<b>Standard Rotation</b>	90° ± 10°
<b>Ambient temperature</b>	-20 to +70 °C

## Optional Specification

<b>PIU</b>	Potentiometer unit (1-10 kΩ)
<b>PCU</b>	Proportional control unit (in/out: 0-10V or 4-20 mA)
<b>RBP</b>	Rechargeable Battery Backup
<b>WTA</b>	Watertight enclosure actuator (IP68 10 m 72 hr)
<b>EXT</b>	Extended Rotation (0 – 270°)
<b>TS</b>	Torque overload indicator via flashing LED module

## Dimensional Drawing

